




Corona™ Heating Oil Treatment The Hi-Tech Treatment and Conditioner for Today's Heating Oil

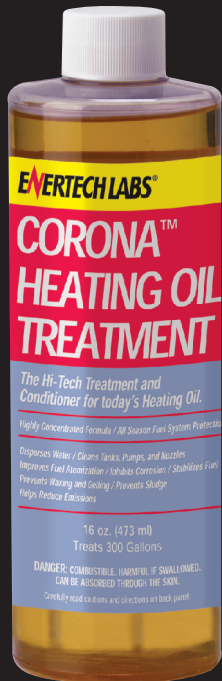

- Cleans Fuel Burner Nozzles and Pumps
- Reduces Oxidation to Stabilize Fuel
- Eliminates Water
- Powerful Anti-Gel
- Organic Based Formula with No Harmful Alcohols
- Improves Fuel Atomization for Greater Efficiency and Reduced Emissions
- Inhibits Fuel Tank Corrosion

Description

Corona™ is the All-Season Treatment to Improve Fuel Efficiency, Stabilize Fuel, Prevent Fuel Gelling, and Eliminate the Harmful Effects of Water in the Fuel. This organic based product is a powerful fuel system and burner cleaner. It dissolves the gum, varnish, and carbon deposits that distort fuel burner spray patterns and damage delicate pump components. Cleaning these parts allows your burner to operate with all the efficiency that the manufacturer designed into it. **Corona™** causes fuel to be atomized better by the burners for more efficient combustion and reduced emissions, plus **Corona™** slows fuel oxidation, stabilizing it. This formula contains no damage causing alcohol. **Corona's** ability to eliminate water can help prevent corrosion of metal parts, damaging sulfuric acid build-up, and fuel freezing in filters and lines. With today's Hi-Tech electronically controlled burners and need to make older equipment last longer a high quality fuel treatment like our **Corona™** product is more important than ever before.

Packaging:

Size	Qty/Case	P/N
16 oz.	24	11124
1 Gallon	4	11126
5 Gallons	1	11127
55 Gallons	1	11129
275 Gallons	1	11120

Measured in US Gallons.

Ratio – 1:2400

SIZE	TREATS
16 oz. bottle	300 gallons
1 gallon	2,400 gallons
5 gallon	12,000 gallons
55 gallon	132,000 gallons
275 gallon	600,000 gallons

ADVANCED FORMULAS

INDUSTRY EXPERTS

SUPERIOR PERFORMANCE

INCREASE ECONOMY

PROFESSIONAL SERVICE

Directions

For best results, use every time you add fuel, adding contents to fuel tank prior to fueling. The fueling process will ensure that complete and proper mixing takes place. Use 16 ounces for each 300 gallons of fuel (1:2400 treatment ratio). First time users can use 16 ounces for each 150 gallons to speed the cleaning process. When operating in extreme conditions (high humidity, very cold weather) it is acceptable to use the 16 ounces per 150 gallons dosage on a regular basis. **Corona™** will eliminate its own volume of water.

Keep This Product Out Of Reach of Children.

***Notice to Purchaser:** Enertech Labs, Inc. provides no warranty of any kind with respect to the product whether express or implied including without limitation, the implied warranty of merchantability or fitness for any intended use or purpose; shall not be liable under any circumstances for any loss, damage, liability, injury or expense directly or indirectly resulting from, arising or related to the use or application of product; shall not be liable for consequential or incidental damages or loss of profits; and its liability shall be limited to replacement of the product.*